

TOWN OF ARLINGTON
Department of Public Works
51 Grove Street
Arlington, Massachusetts 02476
Office (781) 316-3320 Fax (781) 316-3281

Engineering Division


BLUEBERRY HILL LANE

EXCAVATE & REMOVE EXISTING ASPHALT & RECONSTRUCT PAVED ROADWAY

ITEM	QUANTITY	UNIT	DESCRIPTION	UNIT PRICE	AMOUNT
120.1	104	C.Y.	UNCLASSIFIED EXCAVATION	\$ 31.00	\$ 3,224.00
151	69	C.Y.	GRAVEL BORROW	\$ 35.00	\$ 2,415.00
170	625	S.Y.	FINE GRADING & COMPACTING	\$ 5.00	\$ 3,125.00
220.7	2	EA.	SEWER STRUCTURE ADJUSTED	\$ 300.00	\$ 600.00
220.1.2	1	EA.	DRAIN STRUCTURE ADJUSTED	\$ 300.00	\$ 300.00
358	2	EA.	WATER GATE BOX ADJUSTED	\$ 165.00	\$ 330.00
420	85	TON	BITUMINOUS CONCRETE BASE COURSE CLASS 1 @ 2 1/2"	\$ 90.00	\$ 7,650.00
460	52	TON	BITUMINOUS CONCRETE TOP COURSE CLASS 1 @ 1 1/2"	\$ 90.00	\$ 4,680.00
470.2	120	L.F.	HOT MIX ASPHALT BERM, TYPE A - MODIFIED	\$ 8.00	\$ 960.00
					\$ 23,284.00

Assumptions:

Note: These costs are approximate only and determined using the 2014-2015 Massachusetts Highway Department Weighted Bid Averages and available historical cost data. Costs may vary due to unforeseen conditions, weather related events and variable material costs. Final costs to be determined from a proposal submitted by a selected contractor. It is recommended to request a proposal from at least three (3) contractors to receive a fair and competitive quote.

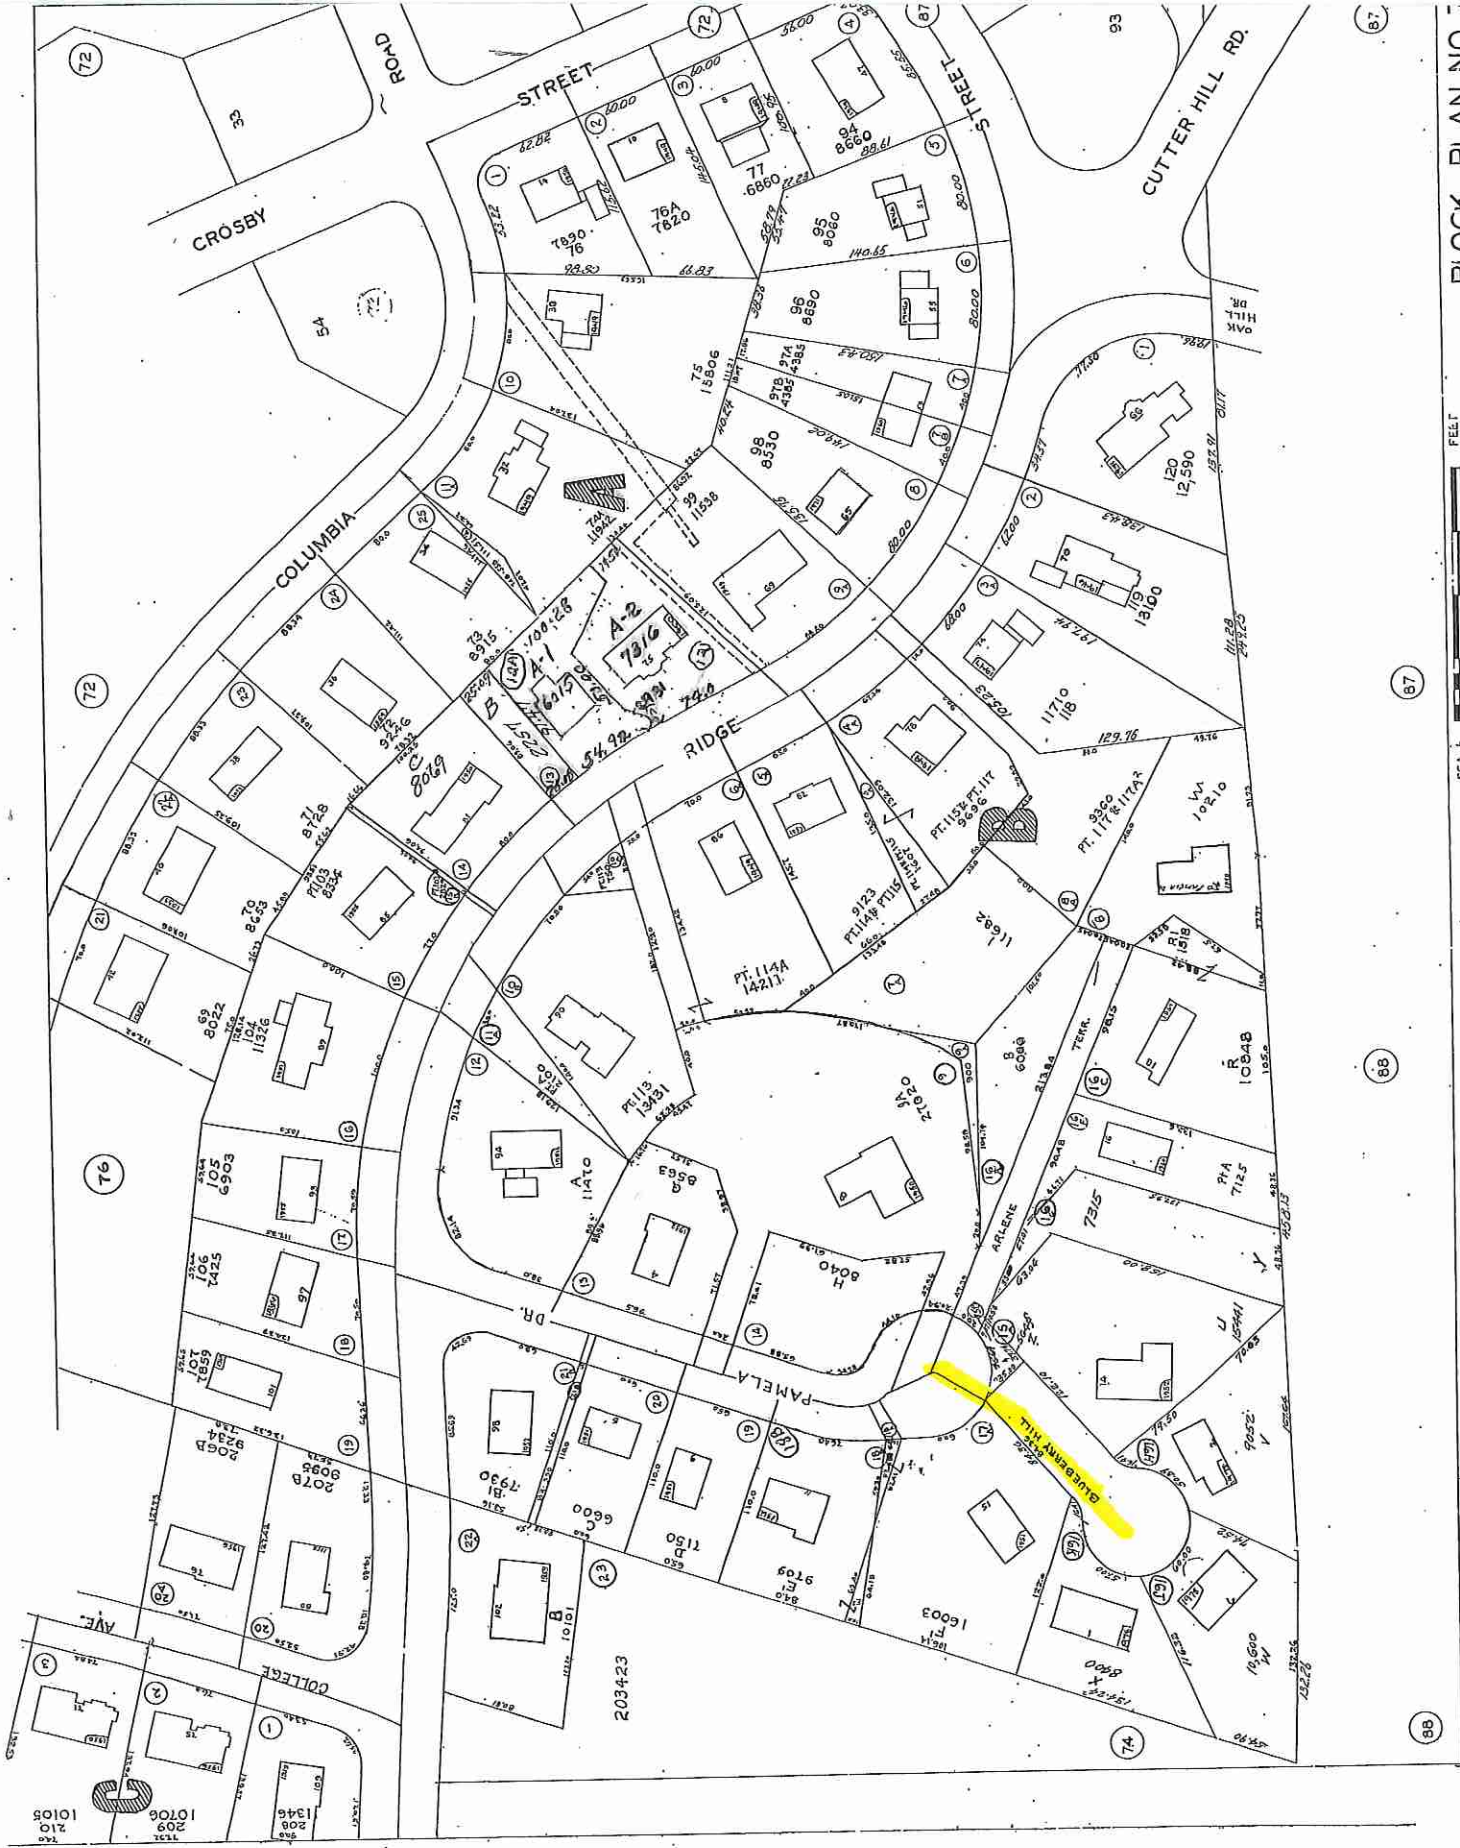

BLOCK PLAN NO. 7

SCALE 0 40 80 FEET