4G
SIGNS & GRAPHICS
EST. 2002

617.861.5453
876 Broadway Revere MA
info@cigotographics.com
www.cigotographics.com

CUSTOMER INFORMATION

FIESTA BITES PIZZERIA
1323 MASSACHUSETTS AVE ARLINGTON MA

PROJECT PROPOSAL

No Poster Approved



170”

FIESTA BITES PIZZERIA — 15”

42”

FIESTA BITES PIZZERIA — 15”

note: the signs not have lights will be a flat sign

EXISTING SIGN



1) 60“X23”
2) 95”X23”
3) 71“X23”
4) 71“X23”

DETAILS

white Polycarbonate 3/16”
1)Black decals 170X15
2) black decals 42“x15

INSTALL

1. CUSTOMER G.C. TO PROVIDE ADEQUATE WOOD OR MTL. BLOCKING IN CORRELATION W/ FACADE FRAMING AS REQUIRED.
2. INSTALLER IS TO V.I.F. & PROVIDE THE PROPER NON-CORROSIVE MOUNTING HARDWARE TO ENSURE SAFE INSTALLATION.
3. ALL EXTERIOR FACADE PENETRATIONS TO BE WATERTIGHT.
4. INSTALLATION TO MEET CURRENT N.E.C., U.L. & LOCAL CODES. LOCATION OF THE DISCONNECT SWITCH AFTER INSTALLATION SHALL COMPLY WITH ARTICLE 600.6(A) (1) OF THE NATION ELECTRICAL CODE

ELECTRICAL

1. ALL ELECTRICAL COMPONENTS TO BE U.L. APPROVED.
2. CUSTOMER IS RESPONSIBLE FOR ONE (1) 120v/ 20a DEDICATED CIRCUIT w/ GROUND PER SIGN TO WITHIN 6' OF SIGN.
3. THIS SIGN IS INTENDED TO BE INSTALLED IN ACCORDING W/ THE REQUIREMENTS OF ARTICLE 600 OF THE NATIONAL ELECTRICAL CODE AND/OR OTHER APPLICABLE LOCAL CODES. THIS INCLUDES PROPER GROUNDING & BONDING OF THE SIGN.

FABRICATOR

1. PLACEMENT OF LIGHTING ELEMENTS FOR OPTIMUM ILLUMINATION OF SIGN TO BE DETERMINED IN PRODUCTION.
2. MANUFACTURER & U.L. LABELS TO BE APPLIED & VISIBLE FROM THE GROUND. LOCATED ON THE LAST CHANNEL LETTER OR END OF THE SIGN BOX/FREESTANDING SIGN

ALL ELECTRICAL COMPONENTS ARE TO BE UL APPROVED

4G
SIGNS & GRAPHICS
EST. 2002

617.861.5453
876 Broadway Revere MA
info@cigotographics.com
www.cigotographics.com

CUSTOMER INFORMATION

FIESTA BITES PIZZERIA
1323 MASSACHUSETTS AVE ARLINGTON MA

WINDOWS PROPOSAL

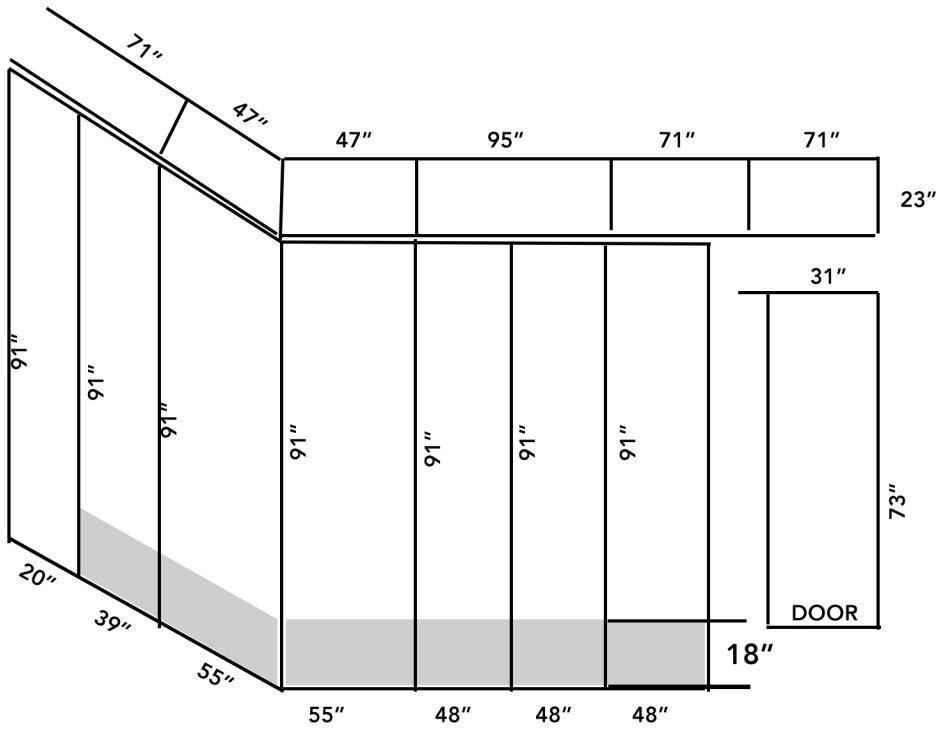

WINDOWS TOTAL AREA:198 SQFT
WINDOWS STICKER AREA:39.2 SQFT: 19.79%

ALL THE OLD STICKET WILL BE REMOVED
THE NEW STICKET WILL BE SHOWING A NEW PICTURES OF THE MENU

EXISTING SIGN





DETAILS

SITICERS

1)48W" X 18H" decoration sticker
2)48W" X 18H" decoration sticker
3)48W" X 18H" decoration sticker
4)55W" X 18H" decoration sticker
5)55W" X 18H" decoration sticker
6)39W" X 18H" decoration sticker

INSTALL

1. CUSTOMER G.C. TO PROVIDE ADEQUATE WOOD OR MTL. BLOCKING IN CORRELATION W/ FACADE FRAMING AS REQUIRED.
2. INSTALLER IS TO V.I.F. & PROVIDE THE PROPER NON-CORROSIVE MOUNTING HARDWARE TO ENSURE SAFE INSTALLATION.
3. ALL EXTERIOR FACADE PENETRATIONS TO BE WATERTIGHT.
4. INSTALLATION TO MEET CURRENT N.E.C., U.L. & LOCAL CODES. LOCATION OF THE DISCONNECT SWITCH AFTER INSTALLATION SHALL COMPLY WITH ARTICLE 600.6(A) (1) OF THE NATION ELECTRICAL CODE

ELECTRICAL

1. ALL ELECTRICAL COMPONENTS TO BE U.L. APPROVED.
2. CUSTOMER IS RESPONSIBLE FOR ONE (1) 120v/ 20a DEDICATED CIRCUIT w/ GROUND PER SIGN TO WITHIN 6' OF SIGN.
3. THIS SIGN IS INTENDED TO BE INSTALLED IN ACCORDING W/ THE REQUIREMENTS OF ARTICLE 600 OF THE NATIONAL ELECTRICAL CODE AND/OR OTHER APPLICABLE LOCAL CODES. THIS INCLUDES PROPER GROUNDING & BONDING OF THE SIGN.

FABRICATOR

1. PLACEMENT OF LIGHTING ELEMENTS FOR OPTIMUM ILLUMINATION OF SIGN TO BE DETERMINED IN PRODUCTION.
2. MANUFACTURER & U.L. LABELS TO BE APPLIED & VISIBLE FROM THE GROUND. LOCATED ON THE LAST CHANNEL LETTER OR END OF THE SIGN BOX/FREESTANDING SIGN

ALL ELECTRICAL COMPONENTS ARE TO BE UL APPROVED